

# FUSO

# CANTER

## CANTER 515 SUPERLOW

4X2 / CITY CAB / DUONIC DCT



**OUR SAFEST CANTER EVER WITH AEBS, LDWS AND ESP STANDARD  
ACCESS UNDERGROUND CAR PARKS WITH 2.1M MAXIMUM HEIGHT RESTRICTION.**

**GVM**

**4,495<sub>KG</sub>**

**GCM**

**7,995<sub>KG</sub>**

**Power/Torque**

**110<sub>KW</sub> / 370<sub>NM</sub>**

- Can be driven on a passenger car license

# CANTER SPECIFICATIONS

## MODEL

4X2 515 SUPERLOW CITY CAB MWB 6 SP. DUONIC AMT (FEA21ER3SFBL)

## WHEEL BASE

3400mm

## GVM (optional)


4,495kg

## GCM (optional)

7,995kg

### Engine

Engine Version	FUSO 4P10-T4 Diesel
Configuration	4 Cyl. In-line DOHC, 4-Valve
Injection System	Bosch Common Rail Direct Injection Bosch Piezo Technology Injectors
Type	Variable Geometry Turbo Charged Air to Air Intercooled
Displacement	3 litre (2998cc)
Bore	95.8mm
Stroke	104mm
Power (DIN)	110kW @ 2840~3500 rpm
Torque (DIN)	370Nm @ 1350~2840 rpm
Maximum Engine Speed	4100 rpm
Compression Ratio	17.5:1
Cooling System / Oil Cooler	Water cooled, 13.0L capacity/ Plate type engine oil cooler
Air Cleaner	Paper Element Type with Restrictor Indicator. Vertical Intake Mounted on Clean Air Side (RH)
Emission Control	Diesel Particulate Filter (DPF) Exhaust Dash Display DPF Status 0~9 (Empty~Full) Parked Regeneration possible from 7~9
Emission Level	ADR 80/03 - Euro 5

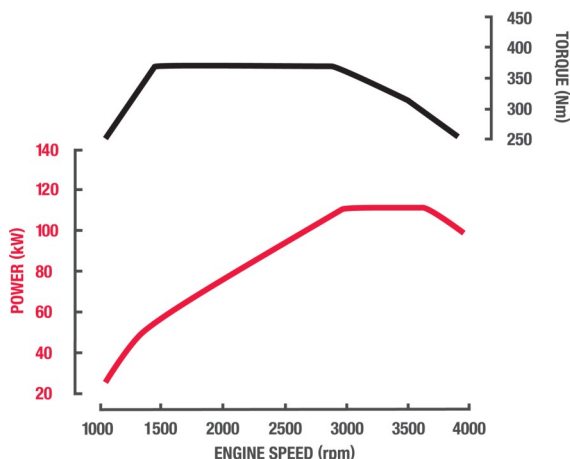

### Fuel

Tank Type	Rectangular Steel Tank with Locking Cap
Fuel Capacity *	100 Litres
Filtration	Filter with Water Separator and Indicator Sensor
Notes	*Max Fill to approx 95% of capacity

### Cooling

Fan Drive	Thermo modulated continuous control (Viscous)
Radiator	Corrugated Fin with Expansion Tank

### Electrical

Voltage	12V Negative Earth
Battery Capacity	2x12V, 70Ah/5hr
Battery Specification	115D31L x2
Headlamp Type	Halogen
Headlamp Capacity	2x55W/60W
Body Builder Harness	Yes*
Notes	*Standard from October 2021 build

### Clutch

Clutch Model	Fully Automated Dual Clutch (no clutch pedal)
Type	Dual Clutch (Wet Multi-plate)

### Transmission

Version	FUSO DUONIC M038S6
Type/Speeds	6 Speed Dual Clutch with Auto and Manual Modes
Features	Virtually Instant Gear Changes In-Dash Gear Lever with Park Brake Position ECO Mode to Minimise Fuel Usage
Ratios	1st: 5.397 2nd: 3.788 3rd: 2.310 4th: 1.474 5th: 1.000 6th: 0.701 Rev. 5.397
PTO Opening	LH Side

### Front Axle

Axle Version	FUSO F200T
Type	Independent Front Suspension
Capacity *	2300kg
Notes	*See MAX LOADING for vehicle capacity.

### Front Suspension

Type	Double Wishbone Independent Front Suspension with Coil Springs and Shock Absorbers
------	---

### Rear Axle

Type	Full Floating Banjo Type
Axle Version	FUSO R030T
Capacity*	3800kg
Ratio	4.444:1
Notes	*See MAX LOADING for vehicle capacity.

### Rear Suspension

Type	Steel Suspension
Details	Parabolic Leaf with Shock Absorbers
Size Main Leaves	1100x70mm

### Max Loading

Front	2180kg
Rear	3800kg
Total	4495kg

### Options

### Steering

Type	Rack & Pinion
Steering Column	Tilt/Telescopic Adjustable
Power Assist	Standard

### Brakes

Type	Hydraulic Dual Circuit with Front and Rear Discs
Size Front	219x28mm
Size Rear	219x28mm
Features	ABS plus EBD (Electronic Brake Distribution) Active Emergency Braking System (AEBS) Electronic Stability Program (ESP) Exhaust Brake Electronic Brake Wear Sensors
Park Brake	Transmission Mounted

### Wheels & Tyres

Wheel Type	7 x Single Piece Disc Rims (Including Spare)
Wheel Size	16.0x5.5K-115
Wheel Stud Pattern	5 Stud 208 PCD
Tyre Size All	185/85R16 111/109
Spare Tyre Carrier	Provided

# CANTER SPECIFICATIONS

## MODEL

4X2 515 SUPERLOW CITY CAB MWB 6 SP. DUONIC AMT (FEA21ER3SFBL)

## WHEEL BASE

3400mm

## GVM (optional)

4,495kg

## GCM (optional)

7,995kg

Chassis		Performance	
Type	Reinforced Tapered Channel	Turning Circle (kerb to kerb - metres)	11.8
Size	188x60x4mm	Road Speed (km/h) at Max Engine Speed	145
Width	699mm	Engine Speed (rpm) at 100km/hr (top gear)	2420
Tensile Strength	440 MPa	Gradeability at Rated GVM (theoretical)*	45%
Instruments		Notes	*This is theoretical performance only. Actual performance may vary under different conditions
Gauges	Speedometer with Odometer Tachometer Fuel Level Water Temperature		
Colour Information Display	Fuel Consumption DPF Bar Chart from 1~9 Water Temperature Lane Departure Warning Maintenance Reminder System Tripmeters		
Multi-Media Package		Mass estimated*	
Satellite Navigation	GPS navigation specifically designed for commercial vehicle applications, with 3 years of Map updates included.	Front*	1400kg
Colour Display	7 inch LCD with touch screen control	Rear*	575kg
Phone Connectivity	Bluetooth® hands free	Total*	1975kg
Audio Visual Entertainment	Bluetooth® music streaming compatible Digital radio DAB+ (also AM/FM for areas not covered by DAB+) & USB	Notes	* Mass (est.) includes oil and water but excludes spare wheel, tools & fuel. Weights provided are subject to 3.5% variation (+/-)
Camera Compatibility	Reverse camera (Factory Fitted) + 5 additional camera options #		
Notes	# Cameras available through spare parts		
Standard Features		Dimensions mm	
Airbag(s)	Dual Air Bags and Seat Belt Pre-Tensioners (Driver & Far Side Passenger)	WFF (Width Front Fender) (mm)	1695
Active Safety Features	ABS plus Electronic Brake force Distribution (EBD) Advanced Emergency Braking (AEBS) Anti-Slip Regulator (ASR) Electronic Stability Program (ESP) Lane Departure Warning System (LDWS)	WRA (Width Rear Axle) (mm)	1856
Cruise Control	Yes	WRT (Width Rear Track) (mm)	1435
Hill Start System	Yes	Width Frame (mm)	699
Cab Cooling & Heating	Air Conditioner / Heater / Demister	A - Length Overall (mm)	5785
Accessory Power	12V Accessory Power Outlet / Cigar Lighter	C - Front Overhang (mm)	990
Driving	Fuso Multimedia Unit Keyless Central Locking Electric Windows Cup Holders 2 3 seats	D - Wheelbase (mm)	3400
Storage	Dual Overhead Storage Pockets In-Dash Centre Document Storage Door Storage Pockets Dash Storage Tray (1 DIN) Coat Hooks	G - Front Axle to Rear of Cab (mm)	525
Cab: External	Door Side Impact Beams	H - Rear of Cab to Rearmost Item Behind Cab (mm)	50
Chassis	Reverse Warning Buzzer Factory Reverse Camera with Infrared Display and Audible Pickup (Supply only in Cabin with Cab Chassis)	I - Rearmost Item Behind Cab to Rear Axle (mm)	2825
Service Intervals		J - Frame, Rear Axle to End (mm)	1395
Interval*	30,000km or 12 Months (whichever occurs first)	P - Height Cab to Ground (mm)	2010
Warranty*		Q - Height Cab to Frame (mm)	1381
Basic/Powertrain	5 Years or 200,000kms (whichever occurs first)	R - Height Rear Frame to Ground (mm)	727
Cab Perforation/Anti Corrosion	5 Years	Body Builder's Notes	
Notes	* Please refer to Fuso Owners Warranty Booklet for additional terms and conditions.	Notes	Chassis reinforcement must be utilised for Tipper/Demountable type body configurations. To conform with ADR 13/00 and 14/02 (lighting/mirror requirements) the following must be adhered to at body installation. - If overall width exceeds 2.1 metres and other than flat type or tipper body is fitted, rear end-outline markers must be installed. - If overall length exceeds 6.0 metres, side reflectors must be installed. - If overall length exceeds 7.5 metres and width exceeds 2.1 metres, side marker lamps must be installed. - If overall width is less than 1.9 metres, the mirrors must be modified to project not more than 230mm. To conform with ADR 42/04 (General Safety), rear wheel guards must be fitted to the vehicle.

# CANTER SPECIFICATIONS

**MODEL**

4X2 515 SUPERLOW CITY CAB MWB 6 SP. DUONIC AMT (FEA21ER3SFBL)

**WHEEL BASE**


3400mm

**GVM (optional)**

4,495kg


**GCM (optional)**

7,995kg



**Call 1800 033 557**

or visit [fuso.com.au](https://fuso.com.au)

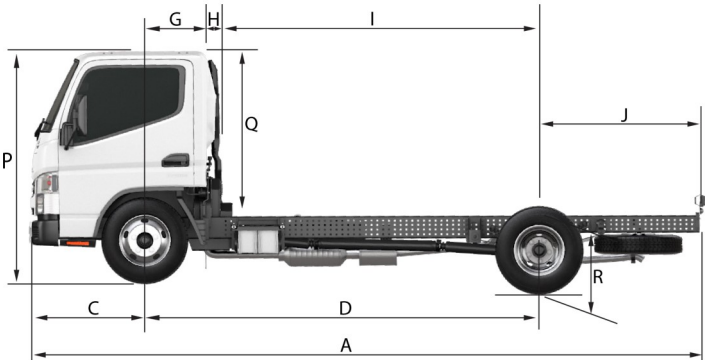

Unless specified in writing herein the accessories, applications, bodies or equipment depicted in this are for illustration purposes only and may not be available from Daimler Truck Australia Pacific Pty Ltd. ABN 86 618 413 282 DTAuP. No representation or warranty whatsoever is given in relation to any accessories, applications, bodies or equipment or suitability of same that are shown herein that may be manufactured, supplied or fitted by a party other than DTAuP. DTAuP reserves the right without notice or obligation to discontinue or make changes to the colour, designs, materials and specifications of the products and options referred to herein at any time. For the most current information and in order to ascertain which accessories, applications, bodies and equipment are available from DTAuP please contact your authorised FUSO dealer. Fuso is a registered trademark of Daimler Truck Australia Pacific Pty Ltd. Copyright DTAuP. Reproduction in whole or part prohibited without written approval. Part Number TSC115B-SSV1. Valid from 05-Nov-21.