

THE SAFEST LIGHT DUTY BUS IN THE MARKET WITH AEBS, LDWS, ESP, ABS, DRIVER AND FRONT PASSENGER SRS AIRBAG'S, LED HEADLAMPS AND REVERSE CAMERA AS STANDARD.

People Inc. driver	Length	Power/Torque
25	7.7 _M	129kW / 430Nm

- · Light rigid licence required
- Actual vehicle may differ from above image



ROSA SPECIFICATIONS

MODELSTANDARD LWB 25 SEAT DUONIC AMT BE741JRMBFAD


LENGTH

7.7M

CONFIGURATION

Low Back Vinyl Bench Seats with Lap Seat Belt

Engine	
	51100 (D.(0.50.D)
Engine Version	FUSO 4P10-T6 Diesel
Configuration	4 Cyl. In-line DOHC, 4-Valve
Injection System	Bosch Common Rail Electronic Direct Injection
Туре	Variable Geometry Turbo Charged Air to Air Intercooled
Displacement	3 litre (2998cc)
Bore	95.8mm
Stroke	104mm
Power (DIN)	129kW @ 2860~3500 rpm
Torque (DIN)	430Nm @ 1600~2860 rpm
Maximum Engine Speed	4150 rpm
Compression Ratio	17.5:1
Cooling System / Oil Cooler	Water cooled,14.1L capacity/ Plate type engine oil cooler
Air Cleaner	Paper Element Type with Restrictor Indicator. Mounted Underbody (RH)
Emission Control	Diesel Particulate Filter (DPF) Exhaust
	Dash Display DPF Status 0~9 (Empty~Full)
	Parked Regeneration possible from 7~9
	Selective Catalytic Reduction (SCR) after-treatment
	system (BlueTec)
Emission Level	ADR 80/04 - Euro VI



Fuel	
Tank Type	Rectangular Steel Tank with Locking Cap
Fuel Capacity *	100 Litres
Filtration	Main Filter with Water Separator Function
AdBlue Exhaust Fluid Capacity	12 Litres
Speed Limiter	Speed Limited 100km/h
Notes	*Max Fill to approx 95% of capacity

Cooling	
Fan Drive	Thermo modulated continuous control (Viscous)
Radiator	Corrugated Fin with Expansion Tank

Electrical		
Voltage	12V / 24V with Battery Equalizer	
Battery Capacity	2x12V, 70Ah/5hr with Battery Equalizer	
Battery Specification	115D31L x2	
Headlamp Type	LED	
Taillamp Type	LED	

Clutch	
Clutch Model	Fully Automated Dual Clutch (no clutch pedal)
Туре	Dual Clutch (Wet Multi-plate)
Operation/Specification	Automated Manual (no clutch pedal)

Version	FUSO DUONIC M038S6
Type/Speeds	6 Speed Automated Manual with Auto and Manual Modes
Features	Synchromesh 1st - 6th and Rev
	Virtually Instant Gear Changes
	In-Dash Gear Lever with Park Brake Position
Ratios	1st: 5.397
	2nd: 3.788
	3rd: 2.310
	4th: 1.474
	5th: 1.000
	6th: 0.701
	Rev. 5.397
Park Interlock Release	Ignition Key (On), Foot Brake Activated & Passenger Door Closed

Front Suspension	
Туре	Independent Double Wishbone with Coil springs, Tranverse Leaf Spring and Double Acting Shock Absorbers

Rear Axle	
Туре	Full Floating Hypoid
Axle Version	FUSO R033B
Capacity*	3800kg
Ratio	5.285:1
Notes	*See MAX LOADING for vehicle capacity.

Туре	HD Steel Suspension
Details	Long Taper with Stabiliser Bar and Shock Absorbers

Max Loading		
Front	2500kg	
Rear	3800kg	
Total	6285kg	

Steering	
Туре	Rack & Pinion with Integral Power Assistance
Steering Column	Tilt/Telescopic Adjustable

Туре	Hydraulic Dual Circuit with Front and Rear Twin Calliper
0	Disc Brakes
Size Front	235x40mm
Size Rear	235x40mm
Features	ABS plus EBD (Electronic Brake Distribution)
	Active Emergency Braking System (AEBS)
	Electronic Stability Program (ESP)
	Exhaust Brake
	Brake Priority System
Park Brake	Transmission
Auxiliarv	Exhaust Brake

Wheels & Tyres	
Wheel Type	Steel Disc 16x5.5
Wheel Size	16.0x5.5G-115
Tyre Size All	Michelin Tyres XJE4 Mix Energy 205/85R16LT 117/115L
Spare Tyre	Provided

Chassis	
Туре	Parallel Tapered Channel with Cross Members



ROSA SPECIFICATIONS

MODELSTANDARD LWB 25 SEAT DUONIC AMT BE741JRMBFAD

LENGTH

7.7M

CONFIGURATION

Low Back Vinyl Bench Seats with Lap Seat Belt

Instruments	
Gauges	Speedometer with LCD Odometer & Dual Tripmeter Tachometer Fuel Level Water Temperature
Warning Lamps	AEBS LDWS ESP ESP Off Turn Signal Headlamps High Beam Hill Holder Auxiliary Brake Parking Brake Oil Pressure Battery Charging Vacuum Pressure DPF Regeneration DPF Fill Level Adblue Fill Level Passenger door open Rear Emergency Door Open

Satellite Navigation	GPS navigation specifically designed for commercial vehicle applications, with 3 years of Map updates included.
Colour Display	8" LCD with capacitive touch screen control
Phone Connectivity	Wireless Apple Carplay & Android Auto Compatible
Audio Visual Entertainment	Bluetooth® music streaming compatible Digital radio DAB+ (also AM/FM for areas not covered by DAB+) & USB
Audio Communication	PA System
Internal Storage Capacity	64GB
Camera Compatibility	Reverse camera (Factory Fitted) + 5 additional camera options #
Notes	# Cameras available through spare parts

Exterior	
Windscreen	Laminated Tinted with Darker Upper Band
Side Windows	Fixed Type with Dark Tint
Body Colour	Rising White with Colour Code Bumpers Black Side Window Sash
Towing Hook	Front

Interior	
Lighting	Access Step Light & LED Interior Lights
Floor	Heavy Duty Vinyl Floor Covering

Active Safety	
Safety Systems	AEBS - Advanced Emergency Braking System LDWS - Lane Departure Warning System ESP - Electronic Stability Program ABS - Anti-lock Braking System ASR - Anti Slip Regulator LED Headlamps
Reverse Warning	Buzzer
Passenger Access Door	Interlock mechanism - Door cannot be opened or closed unless transmission is in park.

Passive Safety	
Airbags	SRS Airbag - Driver and Front Passenger
Body Strength	ADR 59 (Roll-over) & 68 (Occupant Protection) Compliant
mergency Exits	4 Exits (1 LH & 2 RH Windows with Emergency Hammers and Rear Emergency Door)
mergency Operational ecals	Internal & External
ear Swing Door - Opening rection	Outward
ear Door Locking	Automatic when Ignition Key in Off Position
eat Belts - Driver & Driver ssistant	3 Point ELR Lap Sash
Fire Extinguisher	Provided

Driver's Seat	Low Back Sliding with Head Rest Adjustable Height & Back Angle
Visibility Mirrors	LH & RH External Rear View Additional Front Left Clearance Internal Rear Vision Rear Mounted Reversing
General	Power Driver's Window. Cup Holder. Sun Visors Driver and Front Passenger. Central Locking. 12V Accessory Power Outlet.

Air Conditioning (Separate Unit)	
Manual	
12.4 kW JIS	
Integrated Roof Ducts located throughout Cab	
Switchable Fresh Air Duct on Roof at Rear of Cab	

Cabin Heating / Demisting	
Heaters	Forward Cabin plus Passenger Units throughout Cab
Demisters	Forward and Rear Cabin

Passenger Door	Bi Fold Vacuum Automatic	
Passenger Seats	Fixed Low Back	
Seat Belts	ELR 3 Point Driver and Assistant Only ELR 2 Point for Other Seats	
Trim	Vinyl	
Grip Handles	N/A	
Interior	Fully trimmed including Side Windows, Rear Pillars & Emergency Door surrounds	
External Trim	N/A	
Other	N/A	
Modesty Panel - Front Passenger Seat	Front Passenger Seat	

Interval*	15,000km or 6 Months (Whichever occurs first)
Warranty*	
Basic/Powertrain	5 Years or 200,000kms (whichever occurs first)
Cab Perforation/Anti Corrosion	5 Years
Notes	* Please refer to Fuso Owners Warranty Booklet for additional terms and conditions.

ATM (towing capacity)		
Without Trailer Brakes	715kg	
With Trailer Brakes	1615kg	



ROSA SPECIFICATIONS

MODEL

STANDARD LWB 25 SEAT DUONIC AMT BE741JRMBFAD

LENGTH

7 7M

CONFIGURATION

Low Back Vinyl Bench Seats with Lap Seat Belt


Performance

Turning Circle (kerb to kerb) 14.2m

Mass	(estima	ted)*
MUSS	СЕЗИЩЕ	

Total*	3955kg
Note:	* Mass est. includes oil, fuel, water, spare tyre carrier bracket, spare tyre and standard tool set. Weights

Dimensions (mm)	
Width Overall (excluding mirrors)	2070
Width Front Track	1655
Width Rear Track	1495
A - Length Overall (B+C+D)	7730
B - Length Front Overhang	940
C - Length Wheelbase	4550
D - Length Rear Overhang	2240
F - Height Overall	2755
G - Height Floor to Headliner	1860
H - Height Access Door	1755
I - Height Emergency Exit	1480
J - Height First Access Door Step to Ground	375
K - Height Second Access Door Step to Floor	295
L - Width Door Access	665
M - Width Passenger Seat - Right Hand Bench	900
N - Width Single	450
O - Width Driver's Seat	500
P - Width Passenger Aisle	445

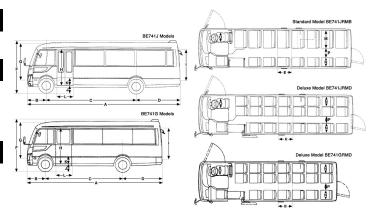



or visit fuso.com.au

Unless specified in writing herein the accessories, applications, bodies or equipment depicted in this are for illustration purposes only and may not be available from Daimler Truck Australia Pacific Pty Ltd. ABN 86 618 413 282 DTAuP. No representation or warranty whatsoever is given in relation to any accessories, applications, bodies or equipment or suitability of same that are shown herein that may be manufactured, supplied or fitted by a party other than DTAuP. DTAuP reserves the right without notice or obligation to discontinue or make changes to the colour, designs, materials and specifications of the products and options referred to herein at any time. For the most current information and in order to ascertain which accessories, applications, bodies and equipment are available from DTAuP please contact your authorised FUSO dealer. Fuso is a registered trademark of Daimler Truck Australia Pacific Pty Ltd. Copyright DTAuP. Reproduction in whole or part prohibited without written approval. Valid from 07-Jan-25.

