



SHOGUN

Shogun 360 6x2 - MY24

7.7L / AMT / AIR SUSP. / XXLWB



OUR SAFEST SHOGUN YET. THE MY24 SHOGUN IS EQUIPPED WITH ABA6, PD, LDWS, ESP, AAA, ASGA 2.0, IHC, AND DRL. ALL BACKED BY OUR CLASS LEADING SERVICE INTERVALS AND 5 YEAR WARRANTY.

GVM

25,000_{KG}

GCM

25,000_{KG}

Power/Torque

260_{kW} / 1,400_{Nm}

- Heavy rigid licence required
- Actual vehicle may differ from above image

SHOGUN SPECIFICATIONS

MODEL

6X2 12 SP. AMT SHOGUN 360 FU84GU1FAA - MY24

WHEEL BASE

6545mm

GVM


25,000kg

GCM

25,000kg

Engine

Engine Version	FUSO 6S10-T1 Diesel
Configuration	6 Cyl. In-line OHC, 4-Valve
Injection System	Common Rail Direct Injection
Type	Twin Turbocharger
Displacement	7.7 litre (7697cc)
Bore	110mm
Stroke	135mm
Power (DIN)	260kW @ 2200 rpm
Torque (DIN)	1400 Nm @ 1200-1600 rpm
Maximum Engine Speed	2500 rpm
Air Cleaner	Paper Element Type with Restrictor Indicator. Vertical Intake Mounted on Clean Air Side (RH)
Emission Control	Diesel Particulate Filter (DPF) plus SCR After-Treatment System
Emission Level	ADR 80/04 - JP17

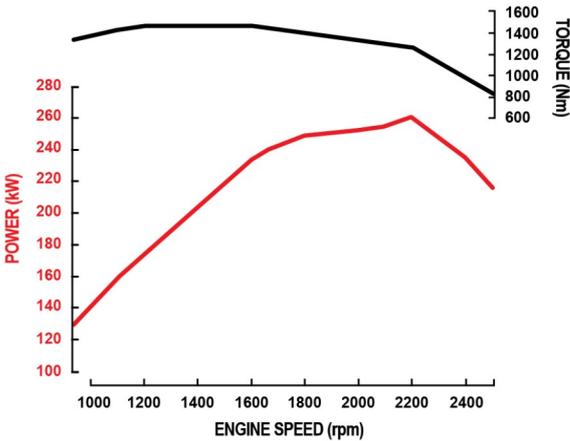

Fuel

Tank Type	Rectangular Steel Tank with Locking Cap
Fuel Capacity *	300 Litres
Filtration	Filter with Water Separator and Dash Indicator
AdBlue Exhaust Fluid Capacity	60 Litres, Tank fitted with locking AdBlue cap
Speed Limiter	Speed Limited 100km/h
Notes	*Max Fill to approx 95% of capacity

Cooling

Fan Drive	Electronically controlled (Viscous)
Radiator	Corrugated Fin with Expansion Tank

Electrical

Voltage	24V Negative Ground
Battery Capacity	2x12V, 120Ah / 20 hr
Battery Specification	115F51 x2
Headlamp Type	Automatic Type Low Beam: LED High Beam: Halogen
Fog Light	Halogen
Daytime Running Lamps	LED

Clutch

Clutch Model	FUSO K4/430
Type	Single Dry Plate
Operation/Specification	Automated Manual (no clutch pedal)

Transmission

Version	FUSO Automated Manual G211-12
Type/Speeds	12 Speed Automated Manual with Auto, Economy and Manual Modes
Ratios	1st: 14.929 2nd: 11.672 3rd: 9.024 4th: 7.055 5th: 5.627 6th: 4.400 7th: 3.393 8th: 2.652 9th: 2.050 10th: 1.603 11th: 1.278 12th: 1.000 RevHigh: 11.672 RevLow: 14.929
PTO Opening	Rear of Transmission

Propeller Shaft

Type	P140
------	------

Front Axle

Axle Version	FUSO F900T
Type	Reverse Elliot 'I' Beam
Capacity *	7100kg
Notes	*See MAX LOADING for vehicle capacity.

Front Suspension

Type	Long Taper Leaf with Stabiliser Bar and Double Acting Shock Absorbers
Size	1650x90mm Leaves

Rear Axle

Type	Full Floating Hypoid Drive with Trailing Rear
Axle Version	FUSO R390T
Capacity*	20800kg
Ratio	3.076:1
Notes	*See MAX LOADING for vehicle capacity.

Rear Suspension

Type	Eight Bag Air Suspension
Details	4 Link with Double Acting Shock Absorber with Stabiliser Bar and ECAS with 2 Memory Positions
Road Friendly Certification Number	RF2135

Max Loading

Front	6500kg
Rear	20800kg
Total	25000kg
Notes	GCM 25,000 kg, no towing capacity.

Steering

Type	Integral Power Assisted Ball and Nut
Steering Column	Tilt/Telescopic Adjustable with Lock

Brakes

Type	Full Air, Dual Circuit with FUSO Taper Rollers
Size Front	410x160mm
Size Rear	410x200mm
Features	Brake Priority System
Park Brake	Rear Wheel Spring Actuated
Engine	Engine Brake 3 Levels of Retardation

SHOGUN SPECIFICATIONS

MODEL

6X2 12 SP. AMT SHOGUN 360 FU84GU1FAA - MY24

WHEEL BASE

6545mm

GVM

25,000kg

GCM

25,000kg

Wheels & Tyres	
Wheel Type	11, Single Piece Steel Disc (Including Spare)
Wheel Size	22.5x7.50-162-13t
Wheel Stud Pattern	10x335mm PCD
Tyre Brand	Bridgestone
Tyre Size Front	295/80R22.5 152/148
Tyre Size Rear	11R22.5 148/145
Spare Tyre Carrier	Not Provided

Chassis	
Type	Parallel Tapered Channel with Cross Members
Size	300x88x7.0
Width	840 mm
Tensile Strength	540 MPa

Instruments	
Gauges	Speedometer Tachometer Fuel Level Air Pressure AdBlue Level
Colour Information Display	Odometer Tripmeter (x2) Hour Meter (x2) Outside Temperature AdBlue Level DPF Information Driving Range (Fuel and AdBlue) Current Vehicle Speed Cruise Control Lane Departure Warning Active Attention Assist Warning Alarm Clock Level Control Service Indicator & Reminder System Air Pressure Coolant Temperature Engine Oil Level & Running Time
Warning Lamps	ABS ASR ESP ESP Off Turn Signal Headlamps High Beam Hill Holder Auxiliary Brake Parking Brake Engine Over-speed Air Pressure Low Cab Tilt Lock DPF Regeneration DPF Status AdBlue Empty AdBlue Contamination Active Brake Assist
Warning Lamp/Buzzer	Air Pressure Cab Tilt Engine Over-speed AdBlue Empty AdBlue Contamination

Multi-Media Package	
Satellite Navigation	GPS navigation specifically designed for commercial vehicle applications, with 3 years of Map updates included.
Colour Display	8" LCD with capacitive touch screen control
Phone Connectivity	Wireless Apple Carplay & Android Auto Compatible
Audio Visual Entertainment	Bluetooth® music streaming compatible Digital radio DAB+ (also AM/FM for areas not covered by DAB+) & USB
Camera Compatibility	1 Reverse Camera fitted as standard Display can accept up to 5 additional cameras#
Notes	# Cameras available through spare parts

Standard Features	
Cruise Control	Adaptive with Stop and Go
Hill Start System	Yes
Cab Cooling & Heating	Climate Control
Accessory Power	24V Accessory Power Outlet (x2) plus Cigar Lighter
Driving	Suspended Driver's Seat Central Locking Electric Windows LH Transom Window Opening Rear Quarter Glass Cup Holder Fluorescent Cabin Lamp
Storage	Centre Storage Compartments (x3 Total, Lockable x1) Driver's Overhead Storage Door Storage Pockets Coat Hooks
Cab: External	Fog Lights Door Side Impact Beams Roof Mounting Points max. static load 70kg Front End-Outline Marker Lamps External PTO controls
Chassis	Integrated Front Underrun System (FUPS) Reverse Warning Buzzer Clear Top of Chassis Rail for ease of Body Fitment

Active Safety	
Safety Systems	ABA6 - Active Brake Assist 6 ASGA 2.0 - Active Sideguard Assist 2.0 PD - Pedestrian Detection AAA - Active Attention Assist PCA - Proximity Control Assist Cruise Control LDWS - Lane Departure Warning System ESP - Electronic Stability Program ABS - Anti-lock Braking System ASR - Anti Slip Regulator LED Headlamps DRL - Daytime Running Lamps IHC - Intelligent Headlight Control EBS - Engine Braking System
Reverse Warning	Wide Dynamic Range Camera and Buzzer
Notes	Active Safety Systems primary function is to provide driver assistance to increase road safety in events of driver inattentiveness. These systems do not allow for lack of attention whilst driving and should not replace safe and alert driving.

Passive Safety	
Airbags	SRS Airbag - Driver
Body Strength	ECE-R29 Cab Strength Compliant
Seat Belts - Driver & Driver Assistant	3 Point ELR Lap Sash, Driver Pre-Tensioner.

Service Intervals	
Interval*	50,000km or 12 Months (whichever occurs first)

Warranty*	
Basic/Powertrain	5 Years or 500,000kms (whichever occurs first)
Notes	* Please refer to Fuso Owners Warranty Booklet for additional terms and conditions.

Performance	
Turning Circle (kerb to kerb - metres)	20.0
Electronically Speed Limited to:	100km/hr Conforms to ADR65/00
Engine Speed (rpm) at 100km/hr (top gear)	1613
Gradeability at Rated GVM (theoretical)*	35%
Notes	*This is theoretical performance only. Actual performance may vary under different conditions

SHOGUN SPECIFICATIONS

MODEL

6X2 12 SP. AMT SHOGUN 360 FU84GU1FAA - MY24

WHEEL BASE

6545mm

GVM

25,000kg

GCM

25,000kg

Mass estimated*



Front*	4020kg
Rear*	2930kg
Total*	6950kg
Notes	* Mass (est.) includes oil and water but excludes spare wheel, tools & fuel. Weights provided are subject to 3.5% variation (+/-)

Dimensions mm

WFF (Width Front Fender) (mm)	2490
WRA (Width Rear Axle) (mm)	2464
WFT (Width Front Track) (mm)	2050
WRT (Width Rear Track) (mm)	1850
Width Frame (mm)	840
A - Length Overall (mm)	11535
C - Front Overhang (mm)	1370
D - Wheelbase (mm)	6545
F - Rear Axle Spacing (mm)	1350
G - Front Axle to Rear of Cab (mm)	878
I - Rearmost Item Behind Cab to Rear Axle (mm)	5667
J - Frame, Rear Axle to End (mm)	3620
N - Height Overall (mm)	3165
O - Air Intake to Cab Roof (mm)	205
P - Height Cab to Ground (mm)	2957
Q - Height Cab to Frame (mm)	1970
R - Height Rear Frame to Ground (mm)	1011

Body Builder's Notes

Notes	<p>Chassis reinforcement must be utilised for Tipper/ Demountable type body configurations.</p> <p>To conform with ADR 13/00 (lighting requirements) the following must be adhered to at body installation.</p> <ul style="list-style-type: none"> - If other than a flat type or tipper body is fitted, rear end out-line marker lamps must be installed. - If overall length exceeds 6.0 metres, side reflectors must be installed. - If overall length exceeds 7.5 metres, side marker lamps must be installed. <p>To conform with ADR 42/04 (General Safety), rear wheel guards must be fitted to the vehicle.</p>
-------	---

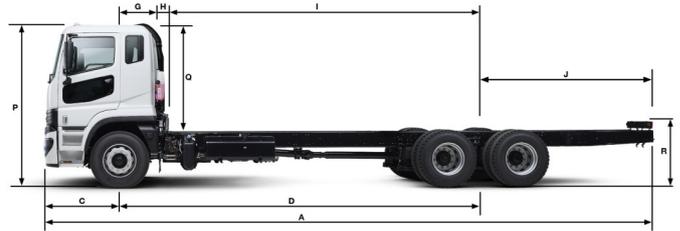

Call 1800 033 557

or visit fuso.com.au

Unless specified in writing herein the accessories, applications, bodies or equipment depicted in this are for illustration purposes only and may not be available from Daimler Truck Australia Pacific Pty Ltd. ABN 86 618 413 282 DTAuP. No representation or warranty whatsoever is given in relation to any accessories, applications, bodies or equipment or suitability of same that are shown herein that may be manufactured, supplied or fitted by a party other than DTAuP. DTAuP reserves the right without notice or obligation to discontinue or make changes to the colour, designs, materials and specifications of the products and options referred to herein at any time. For the most current information and in order to ascertain which accessories, applications, bodies and equipment are available from DTAuP please contact your authorised FUSO dealer. Fuso is a registered trademark of Daimler Truck Australia Pacific Pty Ltd. Copyright DTAuP. Reproduction in whole or part prohibited without written approval. Valid from 13-Jan-25.