

FUSO CANTER

CANTER 615

4X2 / WIDE CAB / MANUAL OR DUONIC DCT



**OUR SAFEST CANTER EVER WITH AEB, LDWS AND ESP STANDARD.
CLASS LEADING 30,000KM SERVICE INTERVALS.**

GVM

6,000_{KG}

GCM

9,500_{KG}

Power/Torque

110_{kW} / 370_{Nm}

- Light rigid licence required. Can be derated and driven with a passenger car licence.
- Actual product may vary from image shown.

CANTER SPECIFICATIONS

MODEL

| | |
|---|-----------------------------------------------|
| A | 4X2 615 WIDE CAB MWB 6 SP. AMT (FEB51ER3SFBG) |
| B | 4X2 615 WIDE CAB LWB 6 SP. AMT (FEB51GR3SFBG) |
| C | 4X2 615 WIDE CAB MWB 5 SP. MAN (FEB51ER4SFBG) |
| D | 4X2 615 WIDE CAB LWB 5 SP. MAN (FEB51GR4SFBG) |

WHEEL BASE

| |
|--------|
| 3400mm |
| 3850mm |
| 3400mm |
| 3850mm |

GVM (optional)


| |
|-------------------|
| 6,000kg (4,495kg) |
| 6,000kg (4,495kg) |
| 6,000kg (4,495kg) |
| 6,000kg (4,495kg) |

GCM (optional)

| |
|-------------------|
| 9,500kg (7,995kg) |
| 9,500kg (7,995kg) |
| 9,500kg (7,995kg) |
| 9,500kg (7,995kg) |

Engine

| | |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------|
| Engine Version | FUSO 4P10-T4 Diesel |
| Configuration | 4 Cyl. In-line DOHC, 4-Valve |
| Injection System | Bosch Common Rail Direct Injection Bosch Piezo Technology Injectors |
| Type | Variable Geometry Turbo Charged Air to Air Intercooled |
| Displacement | 3 litre (2998cc) |
| Bore | 95.8mm |
| Stroke | 104mm |
| Power (DIN) | 110kW @ 2840~3500 rpm |
| Torque (DIN) | 370Nm @ 1350~2840 rpm |
| Maximum Engine Speed | 4100 rpm |
| Compression Ratio | 17.5:1 |
| Cooling System / Oil Cooler | Water cooled, 13.7L capacity/ Plate type engine oil cooler |
| Air Cleaner | Paper Element Type with Restrictor Indicator. Vertical Intake Mounted on Clean Air Side (RH) |
| Emission Control | Diesel Particulate Filter (DPF) Exhaust Dash Display DPF Status 0~9 (Empty~Full) Parked Regeneration possible from 7~9 |
| Emission Level | ADR 80/03 - Euro 5 |

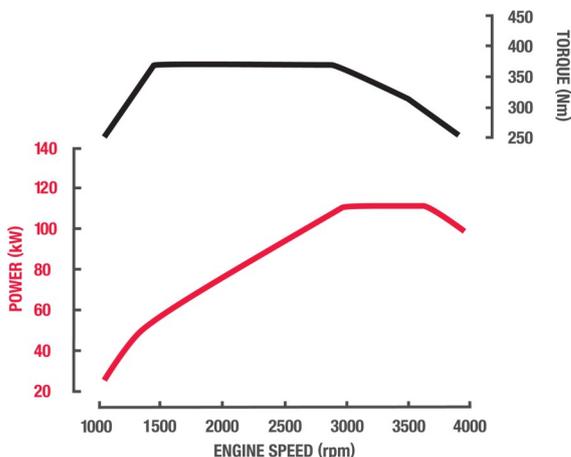

Fuel

| | |
|-----------------|--------------------------------------------------|
| Tank Type | Rectangular Steel Tank with Locking Cap |
| Fuel Capacity * | 100 Litres |
| Filtration | Filter with Water Separator and Indicator Sensor |
| Notes | *Max Fill to approx 95% of capacity |

Cooling

| | |
|-----------|-----------------------------------------------|
| Fan Drive | Thermo modulated continuous control (Viscous) |
| Radiator | Corrugated Fin with Expansion Tank |

Electrical

| | |
|-----------------------|--------------------|
| Voltage | 12V Negative Earth |
| Battery Capacity | 2x12V, 70Ah/5hr |
| Battery Specification | 115D31L x2 |
| Headlamp Type | LED |
| Body Builder Harness | Yes |

Clutch

| | | |
|--------------|---------------------------------------------------|---------------------------------------------|
| Clutch Model | A B Fully Automated Dual Clutch (no clutch pedal) | C D FUSO C4W30 |
| Type | A B Dual Clutch (Wet Multi-plate) | C D Single Dry Plate, Direct Hydraulic Type |

Transmission

| | | |
|-------------|----------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| Version | A B FUSO DUONIC M038S6 | C D FUSO M038S5 |
| Type/Speeds | A B 6 Speed Dual Clutch with Auto and Manual Modes | C D 5 Speed with In-Dash Gearshift Lever |
| Features | A B Virtually Instant Gear Changes In-Dash Gear Lever with Park Brake Position ECO Mode to Minimise Fuel Usage | C D Synchromesh 1st-5th |
| Ratios | A B 1st: 5.397 2nd: 3.788 3rd: 2.310 4th: 1.474 5th: 1.000 6th: 0.701 Rev. 5.397 | C D 1st: 5.494 2nd: 3.038 3rd: 1.592 4th: 1.000 5th: 0.723 Rev. 5.494 |
| PTO Opening | LH Side | |

Front Axle

| | |
|--------------|----------------------------------------|
| Axle Version | FUSO F200T |
| Type | Reverse Elliot 'I' Beam |
| Capacity * | 2600kg |
| Notes | *See MAX LOADING for vehicle capacity. |

Front Suspension

| | |
|------|------------------------------------------------------------------|
| Type | Multi-Leaf with Stabiliser Bar and Double Acting Shock Absorbers |
| Size | 1150x70mm Leaves |

Rear Axle

| | | |
|--------------|----------------------------------------|----------------|
| Type | Full Floating Banjo Type | |
| Axle Version | A B FUSO R033T | C D FUSO R030T |
| Capacity* | 4500kg | |
| Ratio | 4.875:1 | |
| Notes | *See MAX LOADING for vehicle capacity. | |

Rear Suspension

| | |
|------------------|--------------------------------------------------------------------------|
| Type | Steel Suspension |
| Details | Semi-Elliptic Leaf with Stabiliser Bar and Double Acting Shock Absorbers |
| Size Main Leaves | 1250x70mm |

Max Loading

| | |
|-------|--------|
| Front | 2570kg |
| Rear | 4500kg |
| Total | 6000kg |

Options

| | |
|---------|---------------------------------|
| Options | H31: 4495/7995kg GVM/GCM Rating |
|---------|---------------------------------|

Steering

| | |
|-----------------|----------------------------|
| Type | Integral Ball and Nut Type |
| Steering Column | Tilt/Telescopic Adjustable |
| Power Assist | Standard |

CANTER SPECIFICATIONS

MODEL

| | |
|---|-----------------------------------------------|
| A | 4X2 615 WIDE CAB MWB 6 SP. AMT (FEB51ER3SFBG) |
| B | 4X2 615 WIDE CAB LWB 6 SP. AMT (FEB51GR3SFBG) |
| C | 4X2 615 WIDE CAB MWB 5 SP. MAN (FEB51ER4SFBG) |
| D | 4X2 615 WIDE CAB LWB 5 SP. MAN (FEB51GR4SFBG) |

WHEEL BASE

| |
|--------|
| 3400mm |
| 3850mm |
| 3400mm |
| 3850mm |

GVM (optional)

| |
|-------------------|
| 6,000kg (4,495kg) |
| 6,000kg (4,495kg) |
| 6,000kg (4,495kg) |
| 6,000kg (4,495kg) |

GCM (optional)

| |
|-------------------|
| 9,500kg (7,995kg) |
| 9,500kg (7,995kg) |
| 9,500kg (7,995kg) |
| 9,500kg (7,995kg) |

Brakes

| | |
|------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Type | Hydraulic Dual Circuit with Front and Rear Discs Twin Calliper Front and Rear |
| Size Front | 235x40mm |
| Size Rear | 235x40mm |
| Features | ABS plus EBD (Electronic Brake Distribution) Active Emergency Braking System (AEBS) Electronic Stability Program (ESP) Exhaust Brake Electronic Brake Wear Sensors |
| Park Brake | Transmission Mounted |

Wheels & Tyres

| | |
|--------------------|----------------------------------------------|
| Wheel Type | 7 x Single Piece Disc Rims (Including Spare) |
| Wheel Size | 16.0x5.5K-115 |
| Wheel Stud Pattern | 5 Stud 208 PCD |
| Tyre Size All | 205/85R16 117/115 |
| Spare Tyre Carrier | Provided |

Chassis

| | |
|------------------|----------------------------|
| Type | Reinforced Tapered Channel |
| Size | 192x60x6mm |
| Width | 752mm |
| Tensile Strength | 440 MPa |

Instruments

| | |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Gauges | Speedometer with Odometer Tachometer Fuel Level Water Temperature |
| Colour Information Display | Fuel Consumption DPF Bar Chart from 1~9 Water Temperature Lane Departure Warning Maintenance Reminder System Tripmeters |

Multi-Media Package

| | |
|----------------------------|-----------------------------------------------------------------------------------------------------------------|
| Satellite Navigation | GPS navigation specifically designed for commercial vehicle applications, with 3 years of Map updates included. |
| Colour Display | 8" LCD with capacitive touch screen control |
| Phone Connectivity | Wireless Apple Carplay & Android Auto Compatible |
| Audio Visual Entertainment | Bluetooth® music streaming compatible Digital radio DAB+ (also AM/FM for areas not covered by DAB+) & USB |
| Camera Compatibility | 1 Reverse Camera fitted as standard Display can accept up to 5 additional cameras# |
| Notes | # Cameras available through spare parts |

Standard Features

| | |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Airbag(s) | Dual Air Bags and Seat Belt Pre-Tensioners (Driver & Far Side Passenger) |
| Active Safety Features | ABS plus Electronic Brake force Distribution (EBD) Advanced Emergency Braking (AEBS) Anti-Slip Regulator (ASR) Electronic Stability Program (ESP) Lane Departure Warning System (LDWS) |
| Cruise Control | A B C D Yes No |
| Hill Start System | Yes |
| Cab Cooling & Heating | Air Conditioner / Heater / Demister |
| Accessory Power | 12V Accessory Power Outlet / Cigar Lighter |
| Driving | Fuso Multimedia Unit Keyless Central Locking Electric Windows Cup Holders 2 3 seats |
| Storage | Dual Overhead Storage Pockets In-Dash Centre Document Storage Door Storage Pockets Dash Storage Tray (1 DIN) Coat Hooks |
| Cab: External | Front End-Outline Marker Lamps Door Side Impact Beams |
| Chassis | Reverse Warning Buzzer Factory Reverse Camera with Infrared Display and Audible Pickup (Supply only in Cabin with Cab Chassis) |

Cab Features

| | |
|--------------------------|------------------------------------------------------------------------------------------------------|
| Type | All Steel Forward Control Manual Tilt |
| Cab Structure | ECE-R29 European Cab Strength Approved |
| Mounting | Hydroelastic 4 Point |
| Additional Engine Access | A B C D Removable Engine N/A Access Panel |
| Colour | Natural White |
| Windscreen Wipers | 2 Speed + Intermittent Cycle with Integrated Washer Nozzles |
| Rear Vision Mirrors | 1 x Internal 2 x External Convex (ECE 46) - Heated |
| Seating Capacity | 3 |
| Seat Belts | Lap Sash Belts for Outside Seating Positions Lap Belt for Centre Seat Driver Seat Belt Warning |
| Seat (driver) | Suspended with Weight Adjustment, LH Arm Rest and Lumbar Support |
| Seats (passenger) | Flat Folding, 2 Passenger Bench |

Service Intervals

| | |
|-----------|------------------------------------------------|
| Interval* | 30,000km or 12 Months (whichever occurs first) |
|-----------|------------------------------------------------|

Warranty*

| | |
|--------------------------------|-------------------------------------------------------------------------------------|
| Basic/Powertrain | 5 Years or 200,000kms (whichever occurs first) |
| Cab Perforation/Anti Corrosion | 5 Years |
| Notes | * Please refer to Fuso Owners Warranty Booklet for additional terms and conditions. |

Performance

| | |
|-------------------------------------------|-----------------------------------------------------------------------------------------------|
| Turning Circle (kerb to kerb - metres) | A C B D 11.6 13.0 |
| Road Speed (km/h) at Max Engine Speed | 133 |
| Engine Speed (rpm) at 100km/hr (top gear) | A B C D 2478 2555 |
| Gradeability at Rated GVM (theoretical)* | A B C D 34% 35% |
| Notes | *This is theoretical performance only. Actual performance may vary under different conditions |



CANTER SPECIFICATIONS

| MODEL | WHEEL BASE | GVM (optional) | GCM (optional) |
|-------------------------------------------------|------------|-------------------|-------------------|
| A 4X2 615 WIDE CAB MWB 6 SP. AMT (FEB51ER3SFBG) | 3400mm | 6,000kg (4,495kg) | 9,500kg (7,995kg) |
| B 4X2 615 WIDE CAB LWB 6 SP. AMT (FEB51GR3SFBG) | 3850mm | 6,000kg (4,495kg) | 9,500kg (7,995kg) |
| C 4X2 615 WIDE CAB MWB 5 SP. MAN (FEB51ER4SFBG) | 3400mm | 6,000kg (4,495kg) | 9,500kg (7,995kg) |
| D 4X2 615 WIDE CAB LWB 5 SP. MAN (FEB51GR4SFBG) | 3850mm | 6,000kg (4,495kg) | 9,500kg (7,995kg) |

| Mass estimated* | | | | |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------|--------|--------|--------|
| Front* | A B | | C D | |
| | 1565kg | | 1550kg | |
| Rear* | A | B | C | D |
| | 705kg | 725kg | 695kg | 715kg |
| Total* | A | B | C | D |
| | 2270kg | 2290kg | 2245kg | 2265kg |
| Notes | * Mass (est.) includes oil and water but excludes spare wheel, tools & fuel. Weights provided are subject to 3.5% variation (+/-) | | | |

| Dimensions mm | | | | |
|--------------------------------------------------|------|------|------|------|
| WFF (Width Front Fender) (mm) | 1995 | | | |
| WRA (Width Rear Axle) (mm) | 1935 | | | |
| WRT (Width Rear Track) (mm) | 1495 | | | |
| Width Frame (mm) | 752 | | | |
| A - Length Overall (mm) | A C | | B D | |
| | 5935 | | 6685 | |
| C - Front Overhang (mm) | 1140 | | | |
| D - Wheelbase (mm) | A C | | B D | |
| | 3400 | | 3850 | |
| G - Front Axle to Rear of Cab (mm) | 525 | | | |
| H - Rear of Cab to Rearmost Item Behind Cab (mm) | A B | | C D | |
| | 50 | | 81 | |
| I - Rearmost Item Behind Cab to Rear Axle (mm) | A | B | C | D |
| | 2825 | 3275 | 2794 | 3244 |
| J - Frame, Rear Axle to End (mm) | A C | | B D | |
| | 1395 | | 1695 | |
| P - Height Cab to Ground (mm) | 2180 | | | |
| Q - Height Cab to Frame (mm) | 1514 | | | |
| R - Height Rear Frame to Ground (mm) | A C | | B D | |
| | 783 | | 782 | |

| Body Builder's Notes | |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Notes | <p>Chassis reinforcement must be utilised for Tipper/ Demountable type body configurations.</p> <p>To conform with ADR 13/00 and 14/02 (lighting/mirror requirements) the following must be adhered to at body installation.</p> <ul style="list-style-type: none"> - If overall width exceeds 2.1 metres and other than flat type or tipper body is fitted, rear end-outline markers must be installed. - If overall length exceeds 6.0 metres, side reflectors must be installed. - If overall length exceeds 7.5 metres and width exceeds 2.1 metres, side marker lamps must be installed. - If overall width is less than 2.2 metres, the mirrors must be modified to project not more than 230mm. <p>To conform with ADR 42/04 (General Safety), rear wheel guards must be fitted to the vehicle.</p> |

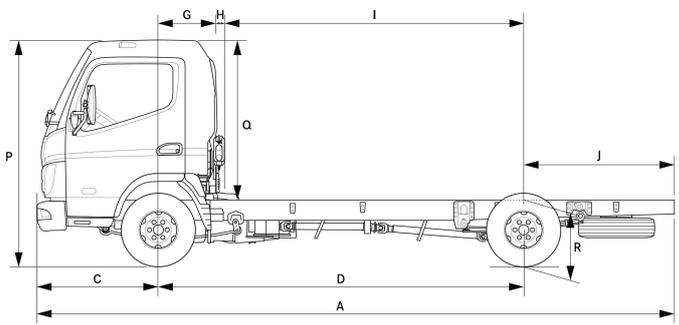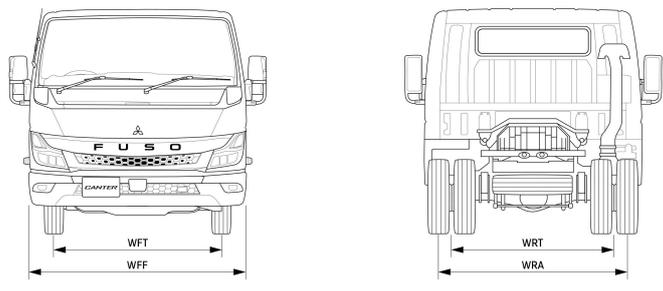

Call 1800 033 557

or visit fuso.com.au

Unless specified in writing herein the accessories, applications, bodies or equipment depicted in this are for illustration purposes only and may not be available from Daimler Truck Australia Pacific Pty Ltd. ABN 86 618 413 282 DTAuP. No representation or warranty whatsoever is given in relation to any accessories, applications, bodies or equipment or suitability of same that are shown herein that may be manufactured, supplied or fitted by a party other than DTAuP. DTAuP reserves the right without notice or obligation to discontinue or make changes to the colour, designs, materials and specifications of the products and options referred to herein at any time. For the most current information and in order to ascertain which accessories, applications, bodies and equipment are available from DTAuP please contact your authorised FUSO dealer. Fuso is a registered trademark of Daimler Truck Australia Pacific Pty Ltd. Copyright DTAuP. Reproduction in whole or part prohibited without written approval. Valid from 19-Mar-24.